

# Specifications

## SMART Height-Adjustable Wall Mount

### Model HAWM-UX/UF

#### Physical specifications

##### Size

Without SMART Board® interactive whiteboard	43 1/2" W x 58" H x 7" D (109 cm x 147.3 cm x 14 cm)
Suggested mounting height for 8' (2.4 m) ceiling	58" (147.3 cm) or lower from floor to wall-mount bracket

##### Weight


Without SMART Board interactive whiteboard	98 lb. (44.4 kg)
--	------------------

##### Shipping size

Without SMART Board interactive whiteboard	61 3/4" W x 21 3/4" H x 7 1/4" D (156.8 cm x 55.2 cm x 18.4 cm)
--	--

##### Shipping weight

Without SMART Board interactive whiteboard	110 lb. (49.9 kg)
--	-------------------

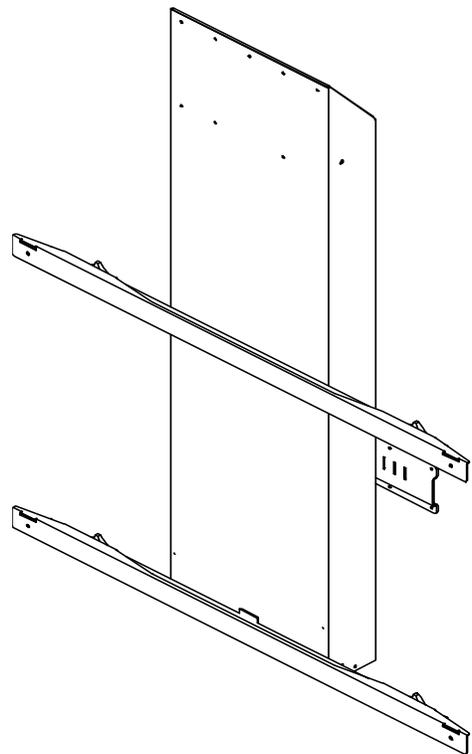

#### **i** NOTE:

For a list of supported interactive projector systems, as well as their shipping sizes, weights and order numbers, see [smarttech.com/supportedsystems](http://smarttech.com/supportedsystems).

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg)

## Standard features

**Adjustable height** 25" (63 cm) of vertical travel allows you to raise or lower your interactive whiteboard to a convenient height.

SMART Board 660  
interactive whiteboard

- Reach points for this interactive whiteboard mounted at 58" (147.3 cm):

**Interactive**

whiteboard position	Lowest reach point	Highest reach point
Lowest position	12 1/8" (30.8 cm)	61 1/8" (155 cm)
Highest position	37 1/8" (94 cm)	86 1/8" (219 cm)

SMART Board 680, M680,  
685, M685, 880 or 885  
interactive whiteboard

- Reach points for this interactive whiteboard mounted at 58 7/8" (149.5 cm):

**Interactive**

whiteboard position	Lowest reach point	Highest reach point
Lowest position	14 7/8" (38 cm)	61 1/8" (155.3 cm)
Highest position	39 7/8" (101 cm)	86 1/8" (219 cm)

**i NOTE**

Reach point refers to the height of the SMART Board interactive whiteboard's touchable screen (see page 4 for more information).

**Power source** Operates from 115V to 230V sources

Uses 100 W while raising or lowering your interactive whiteboard and 3 W at 120 VAC to 8 W at 240 VAC in Standby mode.

**Security** The height-adjustable wall mount automatically locks in position

**Installation** Product installs quickly and easily on a versatile wall bracket

**Mounting hardware** Includes mounting hardware for installation on both stud-walls and solid walls made of brick or cinder concrete block. Check your local building codes to ensure that your wall can support the product's weight.

**Certifications and compliance** China EIP, EU WEEE, EU RoHS, US packaging

**Regulatory certification** CSA, CE, C-Tick and FCC

**Warranty** Two-year limited equipment warranty

## Integration features

**SMART products** Your SMART Height-adjustable wall mount integrates with many SMART Board projector systems. For a complete list of supported systems, see [smarttech.com/supportedsystems](http://smarttech.com/supportedsystems).


## Storage and operating specifications

Operating temperature	Operating temperature range depends on your projector and interactive whiteboard. See your product documentation for more information.
Storage temperature	-40°F to 140°F (-40°C to 60°C)
Humidity	95°F (35°C) with up to 85% relative humidity, non-condensing

## SMART order numbers

HAWM-UX/UF	Height-adjustable wall mount. This product includes wall mounting hardware.
FS-UX	Mobile Height-Adjustable Floor Stand for SMART Board interactive whiteboards. This product includes both a height-adjustable wall mount and a floor stand. For more information, see the product specifications at <a href="https://smarttech.com/kb/144495">smarttech.com/kb/144495</a> .

## Physical dimensions

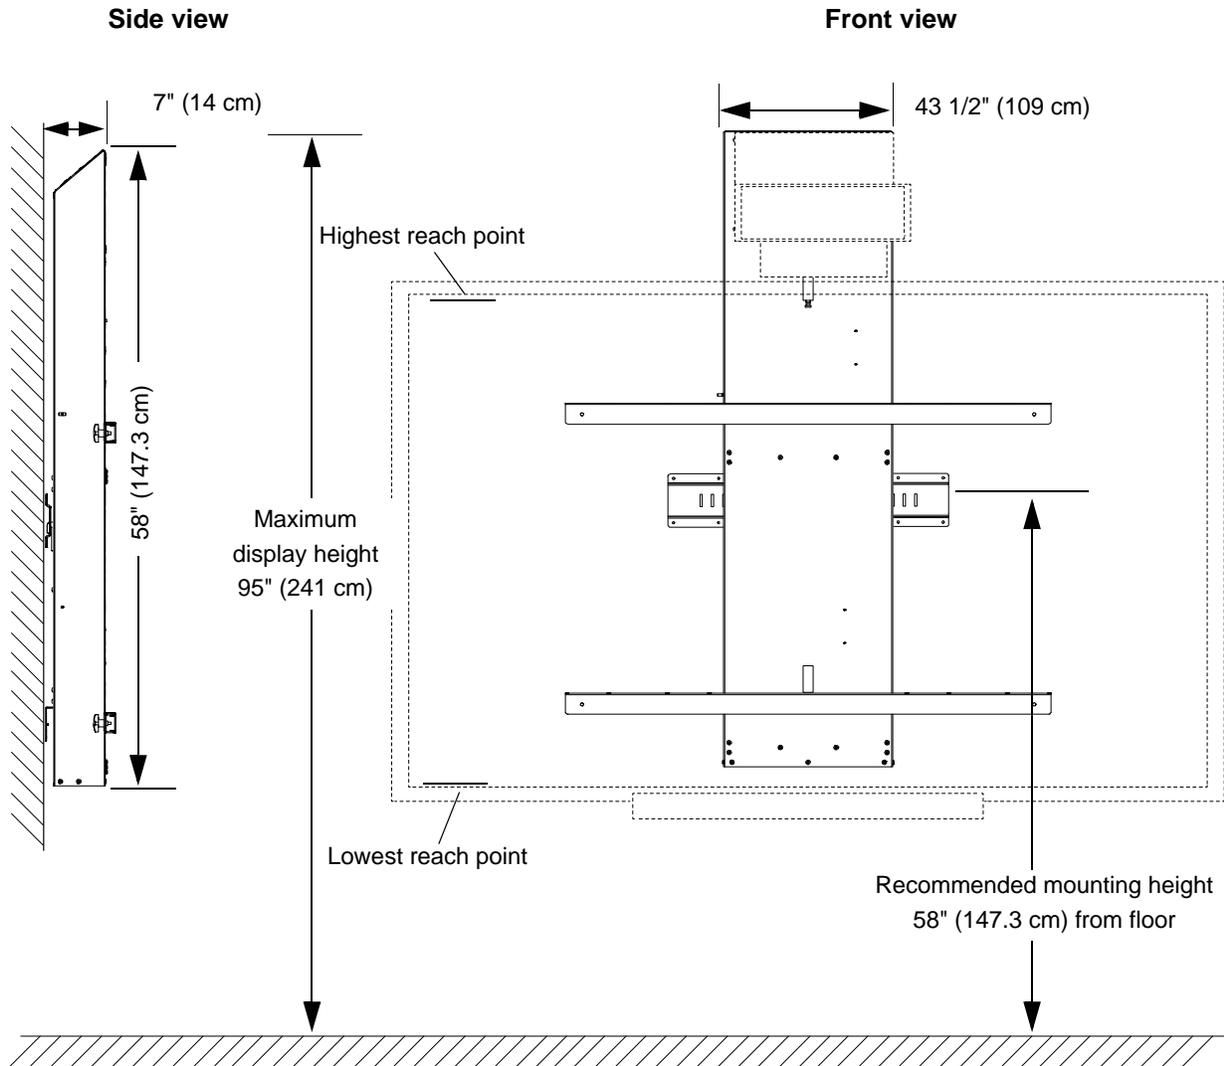

### **i** NOTE

For a list of supported interactive projector systems and their dimensions, see [smarttech.com/supportedsystems](http://smarttech.com/supportedsystems).