

Specifications

SMART Board® 7075R Pro interactive display with iQ

Model SBID-7275R-P

Overview

The SMART Board® 7075R Pro interactive display with iQ and SMART Meeting Pro® software is the hub of your meeting room.

The 4K ultra-high-definition LED display provides optimal image clarity and wide viewing angles. The display's HyPr Touch™ with EMR technology provides industry-leading touch and digital ink performance. You can interact with applications through touch, write or draw over any application with the four pens, and erase with your palm or the two erasers—all without switching tools or modes. With the new True Palm Rejection feature, you can even rest your palm on the screen while writing or drawing. The Pen ID™ feature allows you to assign different appearances to the pens, and multiple users can write or draw at the same time.




The display's embedded iQ experience provides one-touch access to collaborative tools, including a whiteboard, wireless screen sharing, and a web browser. With minimal network integration, there's no need for wires, cables, PCs, appliances, or manual software and firmware updates.

See smarttech.com for more information.

Dimensions and weights¹

Dimensions

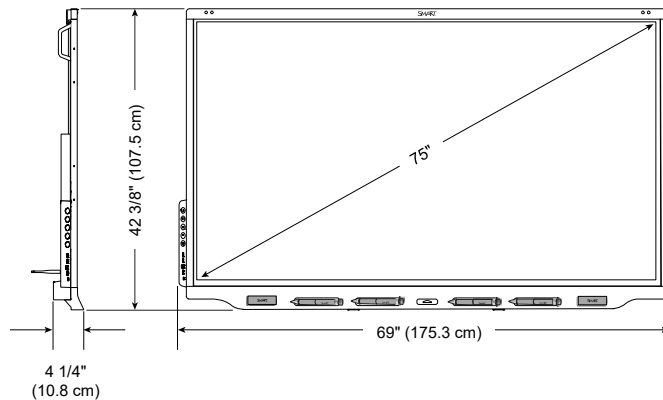

Weight

128 lb. (58 kg)

Shipping dimensions (including pallet)²

76" × 47 3/4" × 11"
(193 cm × 121.2 cm × 28 cm)

Shipping weight

170 lb. (77 kg)

Pending its certification as an ENERGY STAR® certified signage display, the SMART Board 7075R Pro interactive display meets strict energy efficiency guidelines set by the U.S. Environmental Protection Agency and Department of Energy.

¹All dimensions ± 1/8" (0.3 cm). All weights ± 2 lb. (0.9 kg).

²Product ships upright.

SMART BOARD 7075R PRO INTERACTIVE DISPLAY WITH IQ – MODEL SBID-7275R-P

Highlights

HyPr Touch with EMR	Electromagnetic resonance (EMR) technology provides industry-leading performance with absolutely zero contact detect height and support for over 1,000 levels of pressure by the pens, resulting in an intuitive, pen-on-paper feel
True Palm Rejection	Palms, wrists, hands, and other objects are ignored while users write or draw so that they can focus on collaboration instead of how they hold the pens
USB Type-C input	Support for modern devices, with a single connection for touch, video, and audio
Ambient light sensor	Screen automatically dims or brightens, ensuring comfort when viewing content in any lighting condition

Hardware

Interaction

Touch technology	HyPr Touch with EMR
Multitouch capabilities	Up to 20 finger touch points, four pen touch points and two eraser touch points ³
Object Awareness™	Behavior adjusts automatically to the tool or object you're using, whether it's a pen, finger, eraser, or palm
Simultaneous Tool Differentiation	Multiple users can touch the display and use pens and erasers at the same time for a natural, fully collaborative experience
Pen ID	Four people can write independently and simultaneously, using different colored ink
Silktouch™	Ultra-smooth finish that allows you to use the display for hours without finger burn
True Palm Rejection	Palms, wrists, hands, and other objects are ignored while users write or draw
Pressure sensitivity	Detection of over 1,000 levels of pressure by the pens

Display

Type	LCD with LED back light
Aspect ratio	16:9
Optimal resolution (HDMI inputs)	4K UHD (3840 × 2160) at 60 Hz
Horizontal frequency (typical)	135 kHz
Vertical frequency (typical)	60 Hz
Brightness (maximum)	350 cd/m ²
Pixel dimensions	0.4935 mm × 0.4935 mm

³Only up to 10 touch points and no pen or eraser support on Chrome OS™ operating system.

Viewing angle	178°
Response time (typical)	8 ms
1000BASE-T Ethernet	Two external ports for a Gigabit Ethernet switched network connecting the interactive display and the OPS module to an external network and an external device, such as a computer
Wi-Fi	IEEE 802.11A/B/G/N/AC with 2 × 2 MIMO (both 2.4 and 5 GHz bands)
Bluetooth®	Bluetooth 4.2 dual mode (backwards compatible with Bluetooth 2.1 + EDR)
Sensors	<ul style="list-style-type: none"> 2 Occupancy 1 Ambient light 1 IR (for remote control)
Audio	Two 15 W integrated speakers
Noise level	<38 dB SPL
Included cables and accessories	<ul style="list-style-type: none"> 1 Country-specific power cable 1 USB 2.0 cable 4 Pens 2 Erasers 1 Remote control 1 WM-SBID-200 wall mount
Mounting holes	For a standard VESA 800 mm × 400 mm mounting plate Lower mounting holes 17 7/8" (45.2 cm) from the bottom of the interactive display
Mounting bracket depth	Minimum depth of 2" (5.1 cm) for all components on the back of the interactive display for airflow
iQ experience	
iQ experience	iQ experience embedded in the display provides better performance without the need to install a separate appliance
Included apps and features	<ul style="list-style-type: none"> Customizable Home screen Whiteboard Browser Screen Share File and app libraries Writing and drawing over any input Freeze screen and screen shade Automatic software updates

SMART BOARD 7075R PRO INTERACTIVE DISPLAY WITH IQ – MODEL SBID-7275R-P

Supported languages	Danish
	Dutch
	English
	Finnish
	French
	German
	Italian
	Korean
	Norwegian
	Portuguese
	Russian
	Simplified Chinese
	Spanish
	Swedish
	Traditional Chinese
	Ukrainian
	Vietnamese

Software

Included software	iQ Android-based embedded computing
	One-year subscription to SMART Meeting Pro software room edition
	Three-year subscription to SMART Remote Management ⁴
	SMART Ink and SMART Product Drivers

Connectors

Convenience panel	2	USB 3.0 Type-A (for media)
	1	USB 3.0 Type-B (for touch)
	1	USB Type-C
	1	HDMI [®] 2.0 in with HDCP 1.4 and HDCP 2.2 support

⁴Subscription terms may vary in some regions.

Connector panel	1	Accessory slot (for OPS devices, such as the optional SMART PCM8 OPS PC)
	3	USB 3.0 Type-A (for media)
	1	USB 2.0 Type-A (for service use only)
	2	USB 3.0 Type-B (for touch)
	3	HDMI 2.0 in with HDCP 1.4 and HDCP 2.2 support
	1	HDMI 2.0 out
	1	VGA in
	1	Stereo 3.5 mm in
	1	Stereo 3.5 mm out
	1	S/PDIF out
	2	RJ45
	1	RS-232 in
	1	RS-232 out
	Back of display	1
1		AC power out

Installation requirements

Interactive display	See the <i>SMART Board 7000R and 7000R Pro series interactive displays installation and maintenance guide</i> (smarttech.com/kb/171538)
----------------------------	--

! IMPORTANT

The display needs an internet connection for downloading and installing important updates. Ask the network administrator to confirm that the network has been correctly configured for the IQ experience. For more information about network configuration, see [Connecting a SMART display with the IQ experience to a network](#).

Room computers and guest laptops

General requirements	See SMART Meeting Pro software release notes
4K UHD	Video card that can support 3840 × 2160 resolution at 60 Hz See Minimum requirements for Ultra High Definition or 4K on your interactive flat panel

Mini-computers

General requirements	See SMART Meeting Pro software release notes
Dimensions	Smaller than 10" × 10" × 2" (25.4 cm × 25.4 cm × 5.1 cm)
Weight	Less than 10 lb. (4.5 kg)
Mounting	VESA 75 mm × 75 mm or 100 mm × 100 mm mounting pattern

SMART BOARD 7075R PRO INTERACTIVE DISPLAY WITH IQ – MODEL SBID-7275R-P

Cable requirements

HDMI	Maximum length: 23' (7 m)
	<p>NOTES</p> <ul style="list-style-type: none"> • Use only certified HDMI cables that have been tested to support the performance standard you require. • The performance of cables longer than 23' (7 m) is highly dependent on the cable's quality.
USB 2.0	USB 2.0 certified Hi-Speed (480 Mbps) support Maximum length: 16' (5 m)
USB 3.0	USB 3.0 certified SuperSpeed (5 Gbps) support Maximum length: 9' (3 m)
	<p>NOTES</p> <ul style="list-style-type: none"> • SMART supports only installations that use directly connected video and USB cables, AC-powered extenders, or USB extenders purchased from SMART. • You might be able to use higher-grade cables that are longer than specified. If you have problems with such a cable or an extender of any type, test the connection with a shorter cable before contacting SMART Support.
Important	Using cables that exceed these maximum lengths can produce unexpected results, such as degraded picture quality or USB connectivity. Refer to <i>Installation best practices for SMART products</i> (smarttech.com/kb/171035) for comprehensive information about cables and extensions for SMART hardware products.

Storage and operating requirements

Power requirements	100V to 240V AC, 50 Hz to 60 Hz
Power consumption at 77°F (25°C)	
Standby mode	<0.5 W
Normal operating	135 W
Operating temperature	41–95°F (5–35°C)
Storage temperature	-4–140°F (-20–60°C)
Humidity	5–80% relative humidity, non-condensing

Regulatory certifications (Model ID: IDR775-1)

U.S. / Canada	UL, FCC, IC, CONEG Packaging, Proposition 65, Conflict Minerals, ENERGY STAR (pending)
EU / EEA / EFTA	CE, RoHS, REACH, Battery, Packaging, POPs, WEEE
Australia / New Zealand	RCM

Purchasing information

Order number

SBID-7275R-P SMART Board 7075R Pro interactive display with IQ and SMART Meeting Pro software

Optional accessories See [smarttech.com/accessories](https://www.smarttech.com/accessories)

Warranty information

Standard warranty Three-year limited equipment warranty with limited on-site support⁵

Extended warranty and other information See [smarttech.com/warranty](https://www.smarttech.com/warranty)

[smarttech.com/support](https://www.smarttech.com/support)
[smarttech.com/contactsupport](https://www.smarttech.com/contactsupport)

© 2019 SMART Technologies ULC. All rights reserved. SMART Board, SMART Meeting Pro, Pen ID, HyPr Touch, Object Awareness, Silktouch, smarttech, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by SMART Technologies ULC is under license. The Adopted Trademarks HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. All other third-party product and company names may be trademarks of their respective owners. This product and/or use thereof is covered by one or more of the following U.S. patents: www.smarttech.com/patents. Contents are subject to change without notice. October 4, 2019.

⁵Warranty terms may vary in some regions.